
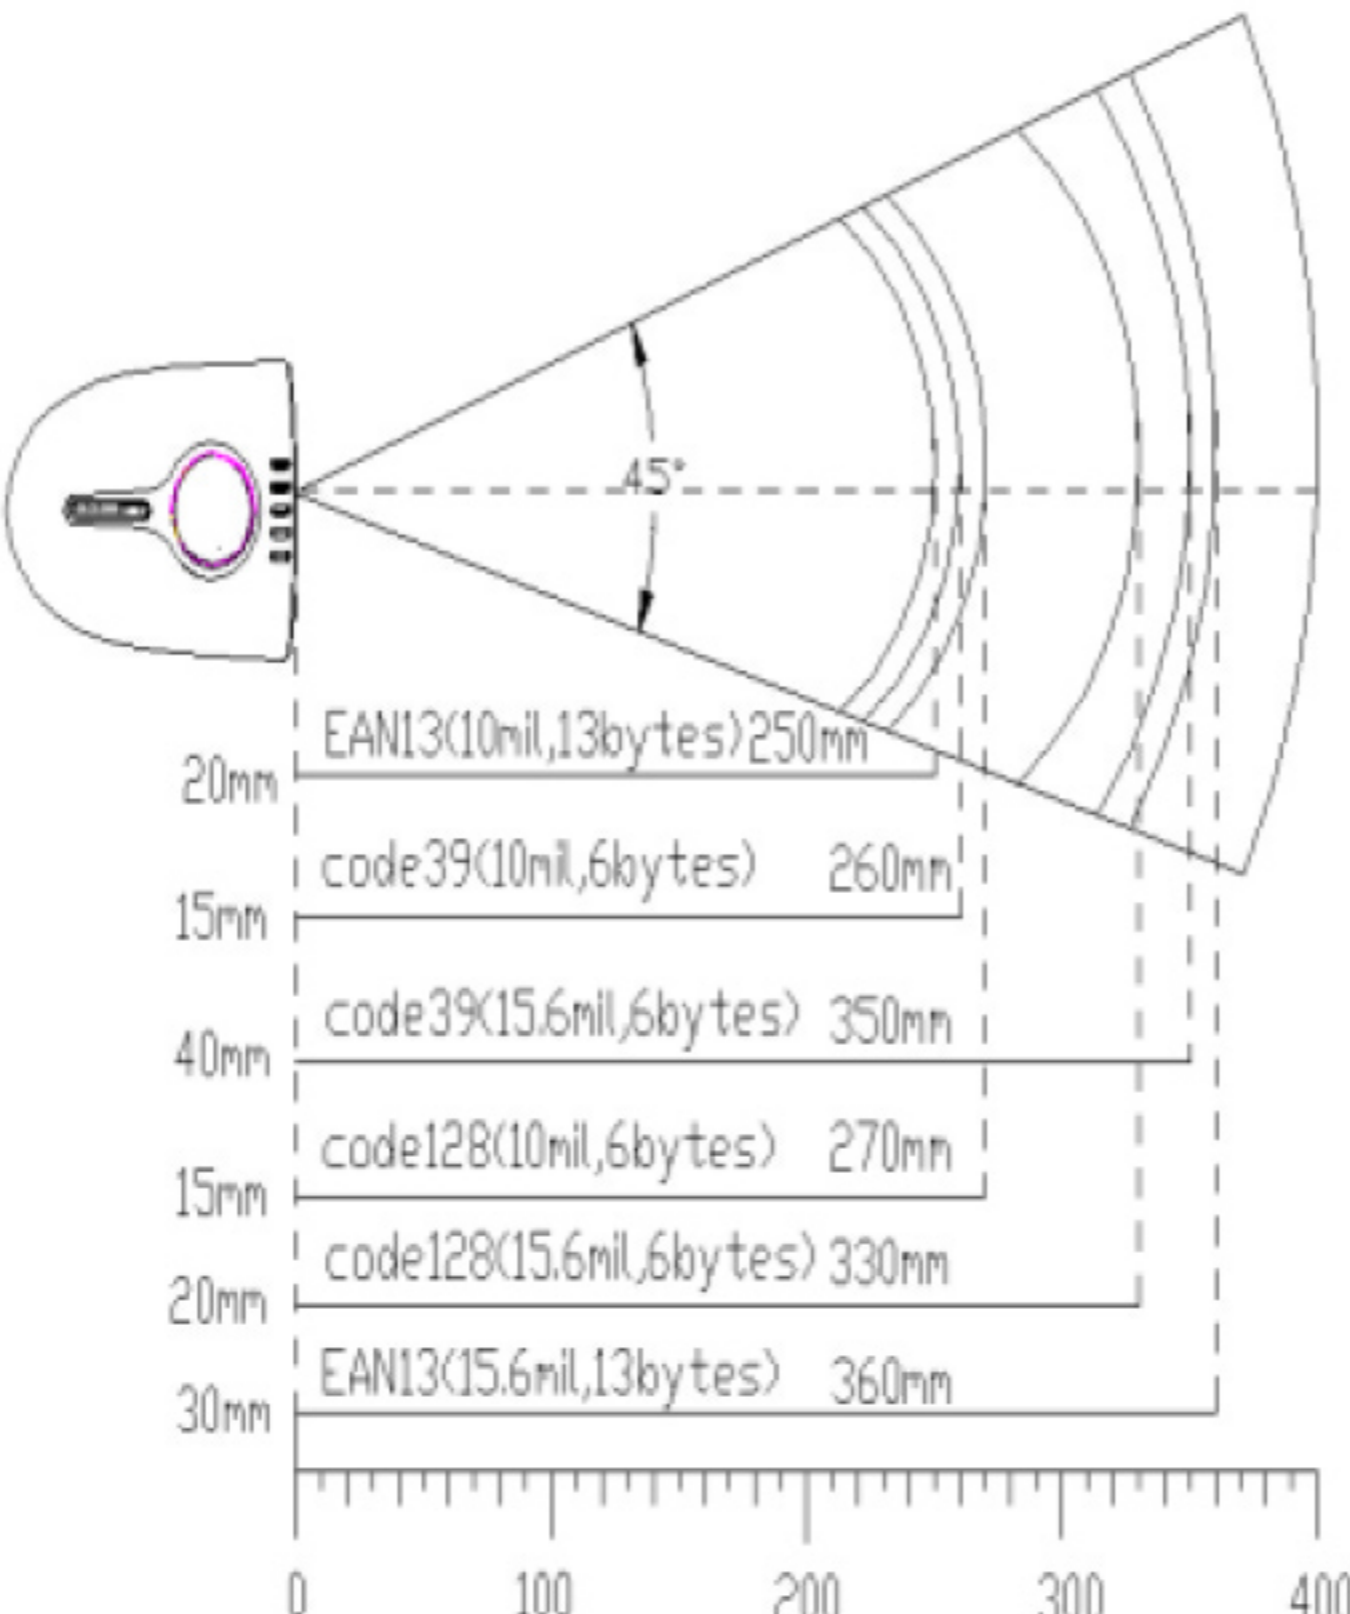


Para	Mode	Picture	YT-760B
Product Picture			
Performance Parameter			
Depth Filed			
Wireless Transmitting Distanc (without barrier)			—
Infrared induction distance			150 - 200mm
Optical Source			650nm Visible red light diode
Image Resolution			≥4mil
Minimum Contrast			≥ 30%
Barcode Types			UPC/EAN/JAN,UPC/EAN with supplementals , UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes。
Decoding Speed			100times/s
Barcode Sensitivity	Tilt		±65°
	Rotate		±42°
	Deflection		±60°
Data Interface Port			RJ-45
Mechanical and Electric Performance			
Size(Length x Width x Height)			92.5×70×154.6 mm
Weight (except cable)			148g
Indicator			Siren and LED light
Battery Capacity			—
Max.Power			500mw
Working Voltage			DC5V
Current	Max.Curren		100ma
	Working Current		97ma
	Stand-by Current		77ma
	Sleeping Current		—
Charging Current			450ma
Accessory List			
Data line			USB data line(1.8m) RS232 data line(1.8m)
Receiver			—
Drive CD			—
Operation Manual			1 Piece
Charging Cradle			—
Stand			1 Set
Environmental Parameter			
Storage Temperature			-40°C ~ 60°C
Working Temperature			0°C ~ 50°C
Relative Humidity			0 ~ 95%
Height Range			1.5m
IP Rating			IP52